


DB-D4-STX DashMatch™ Bracket

2010-2018 Ram

1. Temporarily tab In-Cab Controller into DB-D4-STX bracket to assist in proper placement.

NOTE: In-Cab Controller is wider than DB-D4-STX

2. Place In-Cab controller **AND** DB-D4-STX into position where controller will be mounted (pictured to the right).
NOTE: In-Cab controller should be located as far left from steering column, until left side of in-cab controller contacts vent trim

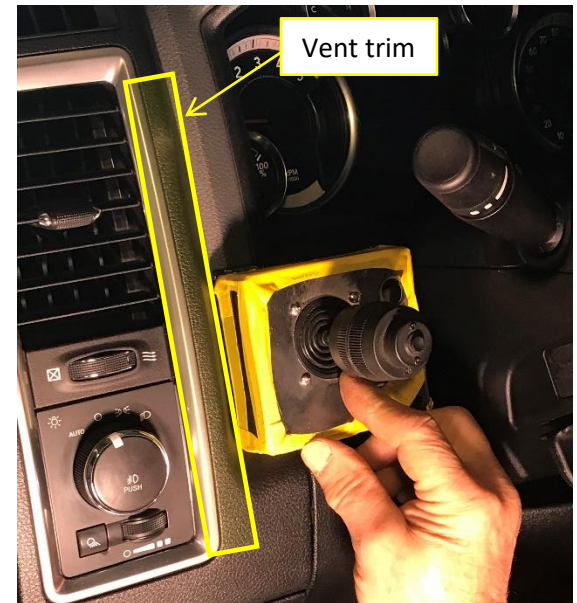

3. Keep DB-D4-STX in place and remove In-Cab controller

4. Place (2) mounting tabs on underside of trim as shown in image to the right.
5. Use (2) #6 screws to secure mounting tabs to trim.

**CAUTION: DO NOT OVER-TIGHTEN SCREWS
SECURING DB-D4-STX BRACKET**



6. Install HYDRASTX® in-cab controller by tabbing into DB-D4-STX dash match bracket
7. Secure in-cab controller to DB-D4-STX using (2) #6 machine screws into the mounting holes of the in-cab controller **CAUTION: THE SCREWS SECURING THE IN-CAB CONTROLLER ARE
THREADED INTO PLASTIC, NOT METAL, DO NOT OVER-TIGHTEN SCREWS SECURING IN-CAB
CONTROLLER**